

ගොවි බලව

රජ

විකුරෝ

විශේෂිත කාර්යයන්

- ගොඩ හෝග වගාවන්හි කාණු සැකසීම
(අරතාපල, බීට්ටු, ලිස්ස, මිරිස, කහ, ඉඟුරු)
- ගොඩ මඩ වගාවන් වල බිම් සැකසීම
(උඩරට වී වගාව සහ අනෙකුත් අතුරු හෝග සඳහා)
- හෝගයන් අතර වල මර්ධනයට
(සේර, දුම්කොළ, අන්නාසි, බඩඉරිඟු)
- පොල් වැනි ස්ථිර හෝග වටා පොහොර දැමීමට
- කාබනික පොහොර නිෂ්පාදනයේදී ගොඩ පෙරලීම සහ කවලම් කිරීම සඳහා

**ඇග්ස්ටාර් වෙතින්
ගොවිමහතූන්ගේ පහසුව
සඳහා හදුන්වාදෙන නවතම
කෘෂිසන්නෝපකරන පෙළ**

අලුත්කමේ
සිට අත්වැන්නාව.
සෞභාග්‍යයේ
අසමසම
නියෝජිත



රත් බීජ



සරු පොහොර



බෝග රැකවරණය



කෘෂි තාක්ෂණය



දේශීය අපනයන

ඇග්ස්ටාර් පී.එල්.සී,
අංක 9, බාවා පෙදෙස,
කොළඹ 8.
දුර: +94 11 4 812 424

AgStar

රොටර් මැෂිම - ඩීසල්

Engine Type: Diesel
Structure type: front-rotating
Engine structure type: air-cooled single cylinder direct-injection four-stroke Vertical

Starting mode: recoil type hand start
Maximum output: 7-9HP
Gear shifting: Rotary tillage/Walking gear/Parking/Reverse gear
Tilling Width: 80cm
Ploughing depth: 15-25cm



සැකැල්ලු වීලර් මැෂිම - පෙට්ට්ටල්


Engine Type: Petrol 1-cylinder, forced air-cooling
Max power: 7HP
Starting mode: hand-pulling
Body Size: 152x82x97cm
Working width: 120cm
Tilling depth: 15-25cm



කාණු සකසන මැෂිම - ඩීසල්

Engine Type: Diesel
Structure type: front-rotating
Engine structure type: air-cooled single cylinder direct-injection four-stroke Vertical

Starting mode: recoil type hand start
Maximum output: 7 - 9HP
Shift: ditch gear/walking gear/parking/reverse gear
Tilling width: 22cm, 25cm, 30cm, 35cm
Cultivation depth: 10 -20CM
Net weight: 85kg

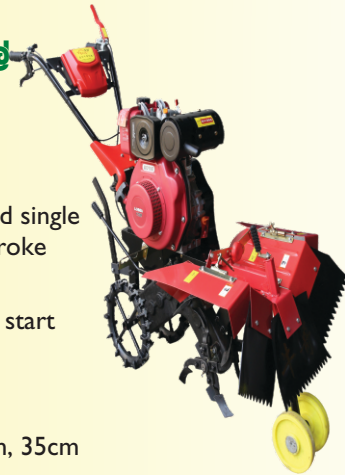

බහුකාර්‍ය මැෂිම - ඩීසල්

Engine Type: Diesel
Structure type: front-rotating
Engine structure type: air-cooled single cylinder direct-injection four-stroke Vertical

Starting mode: recoil type hand start
Maximum output: 7- 9HP
Gear shifting: Rotary tillage/Trenching gear/Parking/Reverse gear
Rotary tillage: 80cm Ditching to cultivate soil: 22cm, 25cm, 30cm, 35cm
Ploughing depth: 15cm
Cultivation depth: 12cm



රොටර් මැෂිම - පෙට්ට්ටල්

Engine Type: Petrol
Structure type: front-rotating
The engine structure type: air-cooled four-stroke single cylinder inclined
Starting mode: hand-operated recoil
Maximum output: 7HP / 9HP
Gear shifting: Rotary tillage/Walking gear/Parking/Reverse gear
Tilling Width: 80cm
Ploughing depth: 10 -15 cm



බහුකාර්‍ය මැෂිම - පෙට්ට්ටල්

Engine Type: Petrol
Structure type: front-rotating
The engine structure type: air-cooled four-stroke single cylinder inclined

Starting mode: hand-operated recoil
Maximum output: 7- 9HP
Gear shifting: Rotary tillage/Trenching gear/Parking/Reverse gear
Rotary tillage: 80cm Ditching to cultivate soil: 22cm, 25cm, 30cm, 35cm
Ploughing depth: 10 -15cm
Cultivation depth: 10-12cm



වීලර් මැෂිම - පෙට්ට්ටල්

Engine model: Petrol
Maximum power: 4HP - 5HP

Starting method: pull

Body size: 152x82x97cm
Working width: 82-120cm
Ploughing depth: 15-25cm



කාණු සකසන මැෂිම - පෙට්ට්ටල්

Engine Type: Petrol
Structure type: front-rotating
The engine structure type: air-cooled four-stroke single cylinder inclined

Starting mode: hand-operated recoil
Maximum output: 7 - 9HP
Shift: ditch gear/walking gear/parking/reverse gear
Tilling width: 22cm, 25cm, 30cm, 35cm
Cultivation depth: 10-20cm



කුරුණෑගල/අනුරාධපුරය
076 350 7541/077 736 5769



පොලොන්නරුව/මහවැලි C කලාපය
077 010 2376/077 297 1010



උතුරු පළාත/අම්පාර/මඩකලපුව
077 135 8625/077 010 2372



දිවයින පුරා
077 359 6815



ප්‍රධාන කාර්යාලය
077 814 9232